


MACRO LED DOWNLIGHT 3CCT DIMMABLE

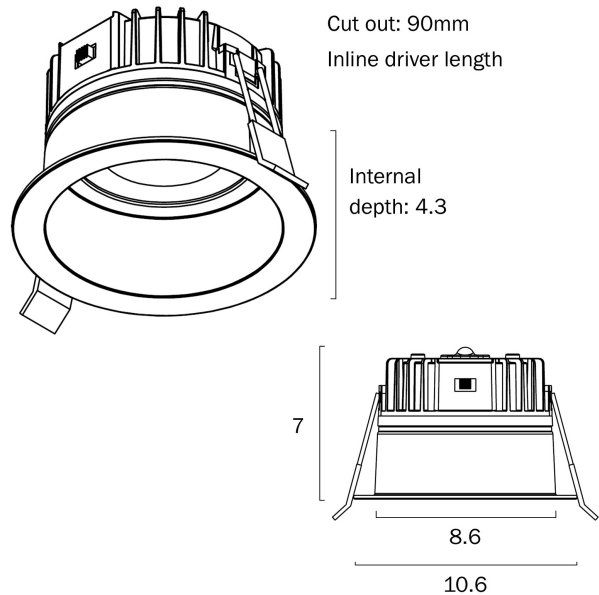

Note: Dimensions are only a guide and may vary due to manufacturing variations.

LIGHT SOURCE

- Voltage Input
240V
- Total Wattage (max)
9
- Globe Type
LED integrated SMD
- Globe / Light Source qty
1
- Globe / Light Source included
Yes
- Color Kelvin
3 CCT (3000k – 4000k – 5000k)
- Color Temperature
Warm White; Natural White; Cool White
- Dimmable
Yes – TRIAC
- Lumens
800
- CRI (Color Rendering Index)
>80

SPECIFICATIONS

- Lead and Plug
Yes
- IP rating
IP44
- Electrical Protection
CLASS II – DOUBLE INSULATED, EARTH NOT REQUIRED
- Insulation class
IC-4
- Beam Angle (degree)
60
- Raked Ceiling Compatible
Yes
- Mounting
Recess

COLOUR AND MATERIAL

- Fixture Material
Polycarbonate,Aluminium,Plastic
- Diffuser Material
Plastic

PRODUCT DIMENSIONS

- Fixture Weight (Kg)
0.23
- Fixture Diameter (cm)
10.6
- Fixture Height (cm)
7
- Cut Out (cm)
9

WARRANTY

- Replacement Warranty
*5 Years

OTHER

- Installation Required
Yes (by Licensed Electrician only)

CARE

- Care Instructions
Do not use strong liquid cleaners,Wipe clean with a dry cloth

VARIANTS

[MACRO DL105-BK3C] MACRO LED DOWNLIGHT 3CCT DIMMABLE (BLACK)	 9329501063774
[MACRO DL105-WH3C] MACRO LED DOWNLIGHT 3CCT DIMMABLE (WHITE)	 9329501063781

Find MACRO LED DOWNLIGHT 3CCT DIMMABLE on
www.telbix.com

