


PICARD 4 LIGHT CEILING SPOTLIGHT

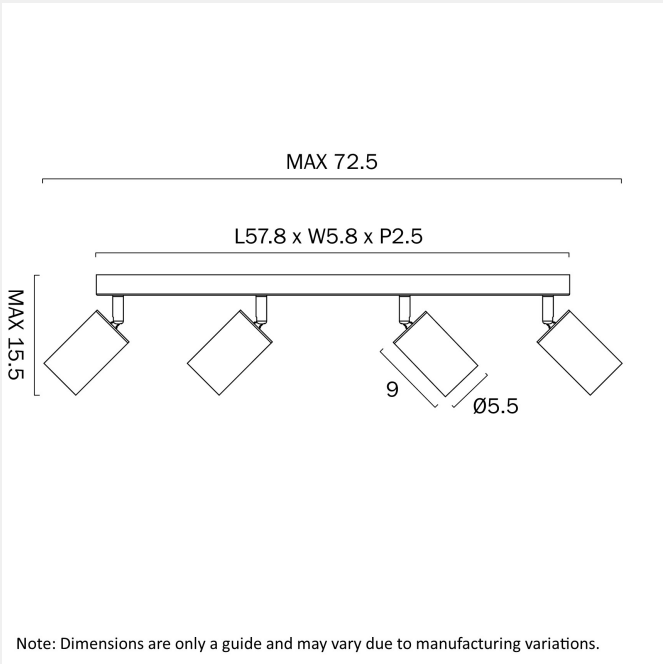

LIGHT SOURCE

- Voltage Input
240V
- Total Wattage (max)
28
- Wattage
7
- Globe Type
GU10
- Globe / Light Source qty
4
- Globe / Light Source included
Yes
- Color Kelvin
3 CCT (3000k – 4000k – 5000k)
- Color Temperature
Warm White; Natural White; Cool White
- Dimmable
No
- CRI (Color Rendering Index)
>90

SPECIFICATIONS

- Lead and Plug
No
- IP rating
IP20
- Electrical Protection
CLASS I – HIGH VOLTAGE, EARTH REQUIRED
- Mounting
Surface

COLOUR AND MATERIAL

- Fixture Material
Aluminium,Iron
- Fixture Finish
Sand

PRODUCT DIMENSIONS

- Fixture Weight (Kg)
1.3
- Fixture Projection (cm)
15.5

Fixture Length (cm)
72.5

Fixture Width (cm)
5.8

WARRANTY

Replacement Warranty
*3 Years

OTHER

Installation Required
Yes (by Licensed Electrician only)

CARE

Care Instructions
Do not use strong liquid cleaners, Wipe clean with a dry cloth. Aluminium, Brass and Stainless Steel will naturally oxidised and change overtime. Exterior products require regular four (4) monthly cleaning and maintenance to ensure they do not accumulate dirt or other environmental deposits. Wipe the product with a mild detergent and warm water to remove surface deposits. Rinse with fresh water and wipe dry with a soft cloth. An extra temporary protection barrier of water displacement oil can help to maintain the surface, such as WD40, sprayed onto a soft cloth and rubbed onto the surface.,

VARIANTS

[PICARD SP4-BK] PICARD 4 LIGHT CEILING SPOTLIGHT (BLACK)	 9329501075821
[PICARD SP4-WH] PICARD 4 LIGHT CEILING SPOTLIGHT (WHITE)	 9329501075838

Find PICARD 4 LIGHT CEILING SPOTLIGHT on
www.telbix.com

